



RX-2050

MULTIVOLTAGE



NEW FUNCTIONS

VRD

HOT START

ARC FORCE



DIGITAL DISPLAY


Variable amperage control with digital meter for simultaneous display of welding current.

PROTECTION

Equipped with temperature, voltage and current sensor protection systems.

VERSATILITY

Welds all cellulosic electrodes (6010, 6011, 6013, etc.) and low hydrogen electrodes (7016, 7018) of any make in Latin America.

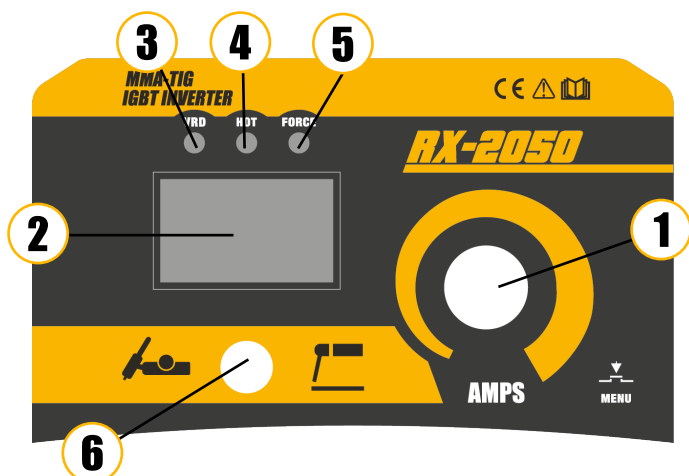

CONTROL PANEL

1. PARAMETER SELECTOR & REGULATOR
2. DIGITAL DISPLAY
3. VRD INDICATOR
4. HOT START INDICATOR
5. ARC FORCE INDICATOR
6. PROCESS SELECTOR

PARAMETERS

MODEL	RX-2050			
INPUT VOLTAGE (V)	1~230±10%		1~120±10%	
FREQUENCY (Hz)	50/60			
RATED INPUT CURRENT (A)	31 TIG	45 Stick	28 TIG	46 Stick
RATED INPUT POWER (KW)	6.9 TIG	10.4 Stick	3.6 TIG	5.9 Stick
WORK DUTY (40°C 10 MIN.)	30% 200A 60% 145A 100% 110A		40% 120A 60% 95A 100% 75A	
CURRENT RANGE (A)	15~200		15~120	
NO LOAD VOLTAGE	62V			
EFFICIENCY %	≥80%			
POWER FACTOR	0.73			
INSULATION CLASS	H			
PROTECTION CLASS	IP21S			
COOLING SYSTEM	AF			
NET WEIGHT	4.8 Kg / 10.6 lbs			
DIMENSIONS	350x130x240 mm / 13.8x5.1x9.4 in			