



Smart Sensor Door / Window

Sensor inteligente de Puerta / Ventana

OWSS-GMW-A

Safety Information

Risk of Electric Shock:Electricity can cause personal injury and property damage if handled improperly.If you are not sure about any part of these instructions,please seek professional assistance from a qualified electrician.

Technical Parameters:

Material: ABS

Size: 71*25*20mm(Main Sensor) 36*10*17mm(Magnet)

Battery: LR03-1.5v/AAA*2 (Alkaline battery)

Battery Life: 6000 times trigger

Standby Current: 8uA

Alarm Current: 70mA~120mA

Wireless Type: 2.4GHz

Wireless Standard: IEEE 802.11b/g/n

Working Temperature: 0℃~40℃

Working Humidity: 20%~85% RH




OMNIA

Product Description

The door/window sensor detects the opening or closing of doors /Windows, combined with other equipment to achieve intelligent application scenes.



Make sure the door magnetic widget is on the side of the alignment sign.

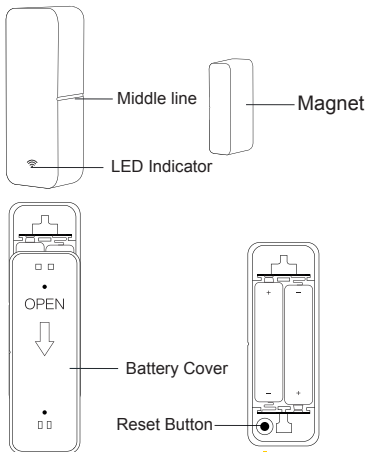

OMNIA

How to Use

slide to open the back cover of battery compartment of the main sensor, take out the insulation sheet.



Insulation sheet

(Notes: when the batteries are run out, please choose Alkeline battery instead of Carbon-zinc battery)

Preparation For Use

① Download Smart Life App on App store or scan the QR code



Please scan the QR code or download Smart Life on App store.



② Registration or Log in.

- Download "Smart Life" Application.
- Enter the Register/Login interface; tap "Register" to create an account by entering your phone number to get verification code and "Set password". Choose "Log in" if you already have a Smart Life account.

Wi-Fi link method: (two matching methods)

3.1 Method one:

Scan the QR code to configure the network guide.




①



②



Scan the QR code




③

Please connect the device according to the configuration process.

OMNIA

3.2 Method two:


1. Make sure your phone is connected to Wi-Fi and Bluetooth.




2. Reset: please hold the reset button for about 5s till indicator blink rapidly. Reset/re-pair is successful.



3. Open the Smart Life App, click "+" in the upper right corner, find the device to be added in the device discovery location, and click "Add".

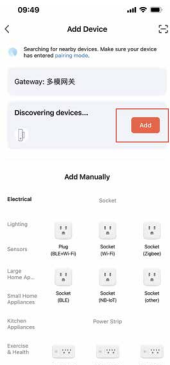

4. Enter the Wi-Fi password, click "Next", and wait for the connection to complete. Add the device successfully you can edit the name of the device to enter the device page by click "Next"



5. Click "Done" to enter the device page to enjoy your smart life with home automation



How to reset/re-pair Wi-Fi code

y, Using the reset needle, press and hold reset button for
e more than 5s until the network indicator flashes.

SERVICE

Thank you for your trust and support to our products, we will provide you with a two-year worry-free after-sales service (freight is not included), please do not alter this warranty service card, to safeguard your legitimate rights and interests. If you need service or have any questions, please consult the distributor or contact us.

Product quality problems occur within 12 months from the date of receipt, please prepare the product and the packaging, applying for after-sales maintenance in the site or store where you purchase; If the product is damaged due to personal reasons, a certain amount of maintenance fee shall be charged for repair.

We have the right to refuse to provide warranty service if:

1. Products with damaged appearance, missing LOGO or beyond the service term
2. Products that are disassembled, injured, privately repaired, modified or have missing parts
3. The circuit is burned or the data cable or power interface is damaged
4. Products damaged by foreign matter intrusion (including but not limited to various forms of fluid, sand, dust, soot, etc.)



RECYCLING INFORMATION

All products marked with the symbol for separate collection of waste electrical and electronic equipment (WEEE Directive 2012/19 / EU) must be disposed of separately from unsorted municipal waste.

To protect your health and the environment, this equipment must be disposed of at designated collection points for electrical and electronic equipment designated by the government or local authorities.



Correct disposal and recycling will help prevent potential negative consequences for the environment and human health. To find out where these collection points are and how they work, contact the installer or your local authority.



WARRANTY CARD

Product Information

Product Name _____

Product Type _____

Purchase date _____

Warranty Period _____

Dealer Information _____

Customer's Name _____

Customer Phone _____

Customer Address _____

Maintenance Records

Failure date	Cause Of Issue	Fault Content	Principal

